

# ZXI8-GPLDD132 Series

HJT HALF-CELL Bifacial Double Glass

Monocrystalline PU Composite Framed PV Module

**690-715W**

POWER RANGE

**23.0%**

MAXIMUM EFFICIENCY

**0.3%**


YEARLY DEGRADATION



15 YEARS PRODUCT WARRANTY



30 YEARS OUTPUT GUARANTEE

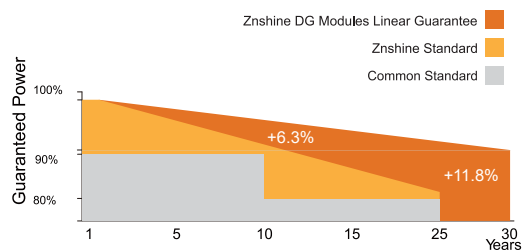

\*Please check the Limited Warranty for Standard PV Modules which is officially released by ZNSHINE PV-TECH Co.,Ltd.



IEC 61215/IEC 61730/IEC 61701/IEC 62716

ISO 14001: Environmental Management System

ISO 9001: Quality Management System

ISO45001: Occupational Health and Safety Management System

\*As there are different certification requirements in different markets, please contact your local znshine sales representative for the specific certificates applicable to the products in the region in which the products are to be used.

## KEY FEATURES



### Excellent Cells Efficiency

High power and efficiency, resulting in lower LCOE and BOS costs.



### Better Weak Illumination Response

More power output in weak light condition, such as haze, cloudy, and early morning.



### Anti PID

Ensured PID resistance through the quality control of cell manufacturing process and raw materials.



### Adapt To Harsh Outdoor Environment

Resistant to harsh environments such as salt, ammonia, sand, high temperature and high humidity environment.



### TIER 1

Global, Tier 1 bankable brand, with independently certified advanced automated manufacturing.



### Excellent Quality Management System


Warranted reliability and stringent quality assurances well beyond certified requirements.




### Power generation gain

Ultra-high bifacial factor (90±10)%, Bring the highest power generation revenue.


DIMENSIONS OF PV MODULE(mm)

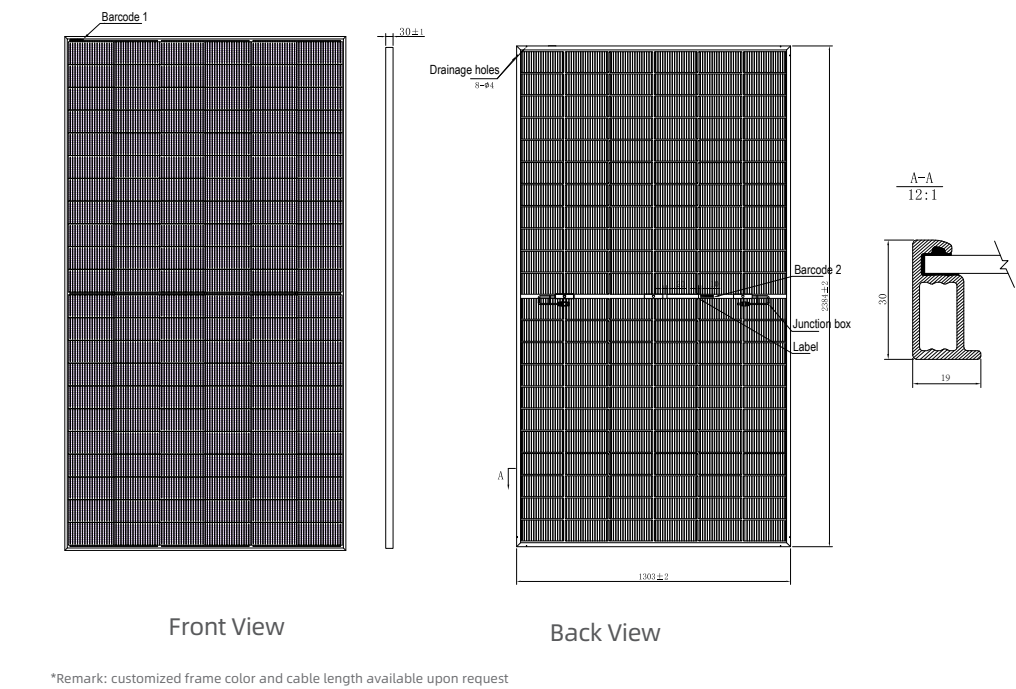

I-V CURVES OF PV MODULE(715W)

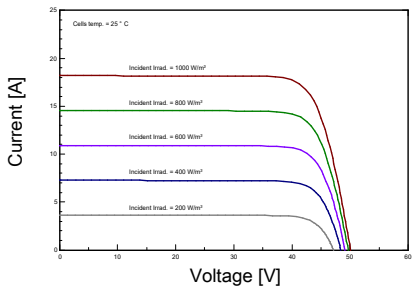

P-V CURVES OF PV MODULE(715W)

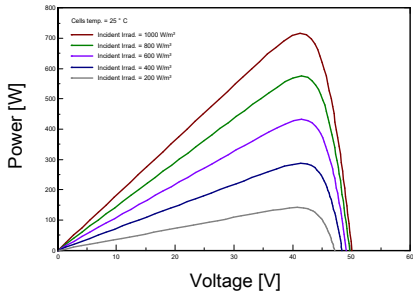

ELECTRICAL CHARACTERISTICS | STC\*

Nominal Power Watt Pmax(W)*	690	695	700	705	710	715
Maximum Power Voltage Vmp(V)	41.40	41.50	41.60	41.70	41.80	41.90
Maximum Power Current Imp(A)	16.67	16.75	16.83	16.91	16.99	17.07
Open Circuit Voltage Voc(V)	49.60	49.70	49.80	49.90	50.00	50.10
Short Circuit Current Isc(A)	17.84	17.91	17.98	18.05	18.12	18.19
Module Efficiency (%)	22.2	22.4	22.5	22.7	22.9	23.0
PowerOutput Tolerance Pmax (%)	0~+3					

\*The data above is for reference only and the actual data is in accordance with the pratical testing

\*STC (Standard Test Condition): Irradiance 1000W/m², Module Temperature 25±2°C, AM 1.5

\*Measuring uncertainty: ±3%, all the electrical characteristics such as Power, Im, Vm and FF are within ±3% tolerance.

MECHANICAL DATA

Solar cells	HJT Monocrystalline (A+)
Cells orientation	132 (6×22)
Module dimension	2384×1303×30 mm (With Frame)
Weight	37.0±1.0 kg
Glass	2.0 mm+2.0mm, High Transmission, AR Coated Heat Strengthened Glass
Junction box	IP 68, 3 diodes
Cables	4 mm² ,350 mm (With Connectors)
Connectors*	MC4-EVO2 compatible

\*Please refer to regional datasheet for specified connector

ELECTRICAL CHARACTERISTICS | NMOT\*

Maximum Power Pmax(Wp)	532.60	536.40	539.80	543.50	547.10	550.80
Maximum Power Voltage Vmpp(V)	39.00	39.10	39.20	39.30	39.40	39.50
Maximum Power Current Imp(A)	13.67	13.72	13.78	13.83	13.89	13.94
Open Circuit Voltage Voc(V)	47.40	47.50	47.60	47.70	47.80	47.90
Short Circuit Current Isc(A)	14.39	14.45	14.51	14.56	14.62	14.68

\*NMOT: Irradiance 800W/m², Ambient Temperature 20°C, AM 1.5, Wind Speed 1m/s

ELECTRICAL CHARACTERISTICS (REAR POWER GAIN) \*

5%	Maximum Power:Pmax(W)	725	730	735	740	746	751
	Module Efficiency(%)	23.3	23.5	23.7	23.8	24.0	24.2
15%	Maximum Power:Pmax(W)	794	799	805	811	817	822
	Module Efficiency(%)	25.5	25.7	25.9	26.1	26.3	26.5
25%	Maximum Power:Pmax(W)	863	869	875	881	888	894
	Module Efficiency(%)	27.8	28.0	28.2	28.4	28.6	28.8

TEMPERATURE RATINGS

NMOT	43°C ±2°C
Temperature coefficient of Pmax	(-0.24±0.024)%/°C
Temperature coefficient of Voc	-0.22%/°C
Temperature coefficient of Isc	0.047%/°C
Refer.Bifacial Factor	(90±10)%

WORKING CONDITIONS

Maximum system voltage	1500 V DC
Operating temperature	-40°C~+85°C
Maximum series fuse	35 A
Front Side Maximum Static Loading	Up to 5400Pa
Rear Side Maximum Static Loading	Up to 2400Pa

PACKAGING CONFIGURATION \*

Piece/Box	36
Piece/Container(40'HQ)	648

\*Customized packaging is available upon request.

\*Remark:Electrical data in this catalog do not refer to a single module and they are not part of the offer.

They only serve for comparison among different module types.

\*Caution:Please be kindly advised that PV modules should be handled and installed by qualified people who have professional skills and please carefully read the safety and installation instructions before using our PV modules.

\*Bifacial Gain: The additional gain from the back side compared to the power of the front side at the standard test condition. It depends on mounting (structure, height, tilt angle etc.) and albedo of the ground.